

Data Center Switch

AS9726-32DB



The Edgecore DCS240 is spine switch for high-performance data centers. The switch provides line-rate L2 and L3 switching across the 32 x QSFP56-DD ports, each supporting 1 x 400 GbE or 1 x 100 GbE, or via breakout cables 2 x 200GbE, 4 x 100 GbE, or 4 x 25 GbE. The DCS240 can be deployed as a spine switch supporting 100/400 GbE spine interconnects. This open network switch is loaded with the Open Network Install Environment (ONIE), which supports the installation of compatible Network Operating System software, including the open source options, plus commercial NOS offerings.

Key Features and Benefits

- Cost-effective, open network switch for data center fabric.
- QSFP56-DD switch ports, each supporting 1 x 400 GbE, or via breakout cables 2 x 200G GbE or 4 x 100 GbE.
Upper 16 ports support up to 24 W per transceiver.
Lower 16 ports support up to 14 W per transceiver.
- Incorporates Broadcom Trident 4 switch series silicon for non-blocking line-rate performance.
- 1 RU form factor.
- Supports hot/cold aisles with front-to-back and back-to-front airflow SKUs.
- All ports on front; PSUs and fans accessible from rear.
- Hot-swappable, load-sharing, redundant 1500 W PSUs.
- 5+1 redundant, hot-swappable fan modules.
- Hardware switch pre-loaded with Open Network Install Environment (ONIE) for automated loading of compatible open source and commercial NOS offerings.



Freedom
of choice



Greater
control



Rapid
innovation




Reduced
CAPEX and OPEX

Free Software Included

onle

Interfaces

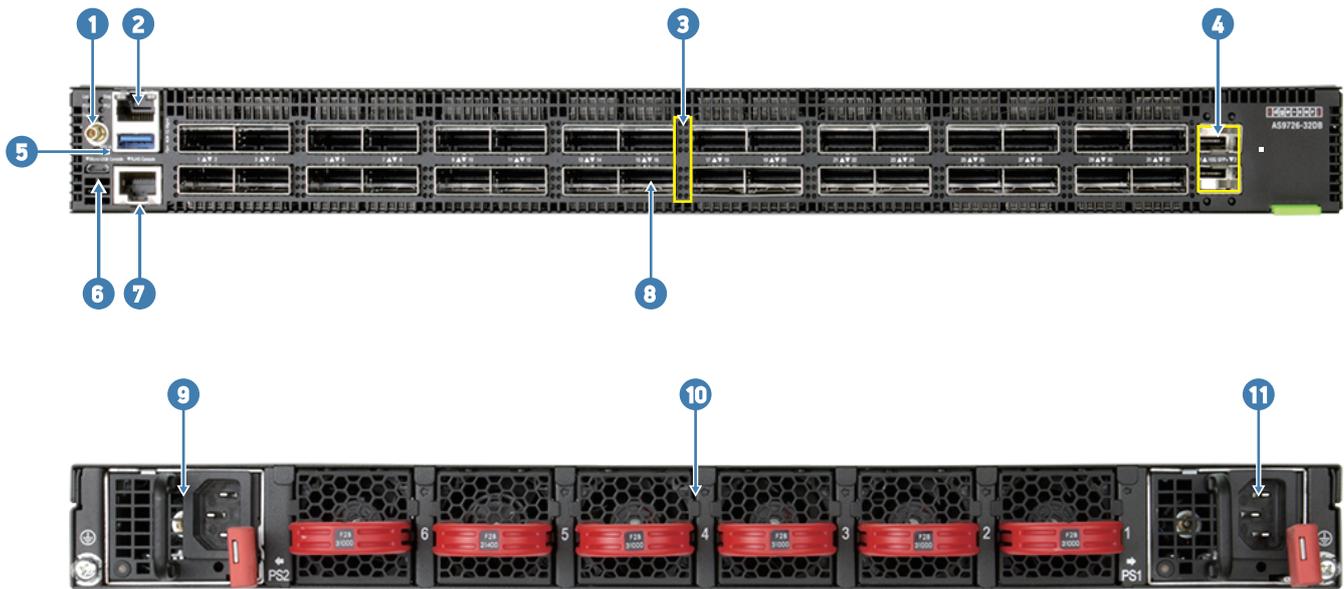

Description

1	1PPS connector	7	RJ-45 console port
2	RJ-45 management port	8	32 x 400G QSFP56-DD ports
3	Port indicators	9	PSU 2
4	2 x 10G SPF+ ports	10	Hot-swappable 5 + 1 redundant fans
5	USB storage port	11	PSU 1
6	Micro USB console port (higher priority)		

Ports

- Switch Ports: 32 x QSFP56-DD 400 GbE
Power Budget: 24 W on upper 16 ports, 14 W on lower 16 ports
- Management Ports on Port Side:
 - 1 x RJ-45 serial console
 - 1 x Micro USB console port
 - Note: When both console ports are connected, only one is active.
The Micro USB port has a higher priority.
 - 1 x RJ-45 1000BASE-T management
 - 2 x SFP+ 10G management
 - 1 x USB 3.0 storage port
- Supported Transceivers and Cables:
 - 40GBASE-SR4/LR4
 - 40G-DAC Cable
 - 100GBASE-SR4/CWDM4/LR4
 - 100G-DAC/AOC Cable
 - 400GBASE-FR4/ZR
 - 400G-DAC/AOC Cable
 - Note: More optics and detailed cabling information can be found at www.edge-core.com.

Key Components

- Switch Silicon: BCM56880 Trident 4 12.8 Tb/s
- CPU Modules:
 - Processor: Intel® Pentium® Processor D1519 4-cores 1.5 GHz
 - SPI Flash: 32MB x 2
 - Memory: DDR4 SO-DIMM 8GB x 2 with ECC support
 - Storage: m.2 NVMe SSD 64GB x 1 MLC

Performance

- Switching Capability: 12.8 Tbps
- Forwarding Rate: 5.4 Bpps
- Jumbo frames support up to 9416 bytes
- Packet Buffer Size: 132 MB SmartBuffer
- MAC Addresses: max. 384K

Physical and Environmental

- Dimensions (WxDxH): 43.84 x 59 x 4.35 cm (17.26 x 23.23 x 1.71 in.)
- Weight: 11.85 kg (26.12 lb), with 2 PSUs and 6 fans installed
- Fans: Hot-swappable 5 + 1 redundant fans
- Storage Temperature: -40°C to 70°C (-40°F to 158°F)
- Operating Temperature:
 - (FtoB): 0°C ~ 45°C (32°F ~ 113°F)
 - (BtoF): 0° C ~ 35° C (32°F to 95°F)
- Operating Humidity: 5% ~ 95% non-condensing

Software

- Switch is loaded with Open Network Install Environment (ONIE) software installer
- Compatible with the following NOS options: open source options, plus commercial NOS offerings.

Power

- PSUs: 2 redundant, load-sharing, hot-swappable AC
- AC input ranges:
 - 100-180VAC at 50-60Hz (1000 W max.)*
 - 200-240VAC at 50-60Hz (1500 W max.)
 - *200-240VAC may be required for power redundancy under full loading.
 - AC Inlet: IEC 60320 C14
- Power Consumption
 - Min. (w/o transceivers): 396 W@100VAC/386 W@240VAC
 - Max. (w/o transceivers): 714 W@100VAC/653 W@240VAC

Regulatory

- Emissions:
 - EN 55032:2015+AC:2016, Class A
 - EN 61000-3-2:2014, Class A
 - EN 61000-3-3:2013
 - FCC Class A
- Immunity:
 - EN 55035:2017
 - EN 55024:2010+A1:2015
 - IEC 61000-4-2/3/4/5/6/8/11
- Safety:
 - UL (CSA 22.2 No 62368-1 & UL62368-1)
 - CB (IEC/EN60950-1 & IEC/EN 62368-1)
- Environmental:
 - GR63-CORE (Pre-test)
- RoHS-2.0 Compliant
- Electrical and Electronic Equipment (WEEE Directive 2002/96/EC)

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2022 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

Ordering Information

Base model: AS9726-32DB; Intel® Pentium® Processor D1519; 32-Port 400G QSFP56-DD; ONIE software installer.

Model Number	Part Number	PSU	Airflow	Region (power cord)
AS9726-32DB-O-AC-F	FP5ZZ8632023A	Dual AC PSUs	Port-to-Power airflow	without power cord
AS9726-32DB-O-AC-B	FP5ZZ8632025A	Dual AC PSUs	Power-to-Port airflow	without power cord

200-240VAC, 1500 W max. (power redundancy under full loading)

Model Number	Part Number	PSU	Airflow	Region (power cord)
AS9726-32DB-O-AC-F-UN	FP5ZZ8632405A	Dual AC PSUs	Port-to-Power airflow	IEC 60320 C13-C14
AS9726-32DB-O-AC-B-UN	FP5ZZ8632406A	Dual AC PSUs	Power-to-Port airflow	IEC 60320 C13-C14
AS9726-32DB-O-AC-F-EU	FP5ZZ8632202A	Dual AC PSUs	Port-to-Power airflow	IEC 60083 Type E/F (CEE 7/7) EU
AS9726-32DB-O-AC-B-EU	FP5ZZ8632203A	Dual AC PSUs	Power-to-Port airflow	IEC 60083 Type E/F (CEE 7/7) EU
AS9726-32DB-O-AC-F-UK	FP5ZZ8632302A	Dual AC PSUs	Port-to-Power airflow	IEC 60083 Type G (BS 1363) UK
AS9726-32DB-O-AC-B-UK	FP5ZZ8632303A	Dual AC PSUs	Power-to-Port airflow	IEC 60083 Type G (BS 1363) UK

100-120VAC, 1000 W max. (may not have power redundancy under full loading, depending on type and number of transceivers present)

Model Number	Part Number	PSU	Airflow	Region (power cord)
AS9726-32DB-O-AC-F-US	FP5ZZ8632402A	Dual AC PSUs	Port-to-Power airflow	NEMA 5-15
AS9726-32DB-O-AC-B-US	FP5ZZ8632403A	Dual AC PSUs	Power-to-Port airflow	NEMA 5-15
AS9726-32DB-O-AC-F-JP	FP5ZZ8632502A	Dual AC PSUs	Port-to-Power airflow	JIS C 8303, Class I
AS9726-32DB-O-AC-B-JP	FP5ZZ8632503A	Dual AC PSUs	Power-to-Port airflow	JIS C 8303, Class I