

1G 80km SFP Transceiver

ET4202-ZX



Product Features

- Up to 1.25 Gbps data links
- 1550 nm DFB laser transmitter
- Up to 80 km on 9/125 μm SMF
- Duplex LC receptacle optical interface compliant
- Hot pluggable
- RoHS compliant
- Commercial operating temperature: 0°C to +70°C

Applications

- Gigabit Ethernet
- Fiber Channel
- Metro/Access Networks

Descriptions


The ET4202-ZX transceivers are high performance, cost effective modules supporting data-rate of 1.25 Gbps and 80 km transmission distance with SMF. The transceivers are compatible with SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA and SFF-8472.

Ordering Information

Part Number	Transmitter	Output Power	Sensitivity	Reach	Temp	DDM	RoHS
ET4202-ZX	1550 nm	-2.0 ~ 3.0 dBm	-24.0 dBm	80 km	0~ 70 °C	Available	Compliant

Pin Description

**Towards
Bezel**

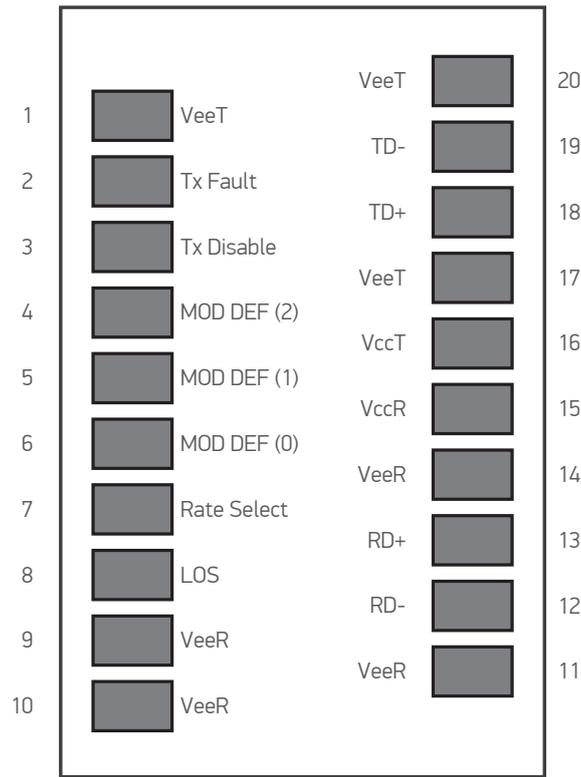

**Towards
ASIC**

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Minimum	Maximum	Unit
Storage Temperature	Ts		85	°C
Relative Humidity	RH	0	85	%
Supply Voltage	Vcc	-0.5	4	V

Recommended Operating Conditions

Parameter	Symbol	Minimum	Typical	Maximum	Unit	
Operating Case Temperature	Tc	0	25	70	°C	
Supply Voltage	Vcc	3.13	3.3	3.47	V	
Data Rate PER Channel	-	-	1.25	-	Gb/s	

Transceiver Electrical Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Input Differential Impedance	Rin	90	100	110	Ω	

Transmitter Optical Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Launch Optical Power	Po	-2	-	3	dBm	1
Center Wavelength Range	λc	1500	1550	1580	nm	-
Extinction Ratio	ER	8.2	-	-	dB	

Notes:

1. The optical power is launched into SMF.





Receiver Optical Characteristics

Parameter	Symbol	Minimum	Typical	Maximum	Unit	Notes
Center Wavelength	λc	1270		1610	nm	
Receiver Sensitivity in Average Power	Sen			-24	dBm	1

Notes:

1. Measured with Light source 1550 nm, ER=9dB; BER = 10^{-12} @ PRBS=2⁷-1 NRZ.

Mechanical Specifications

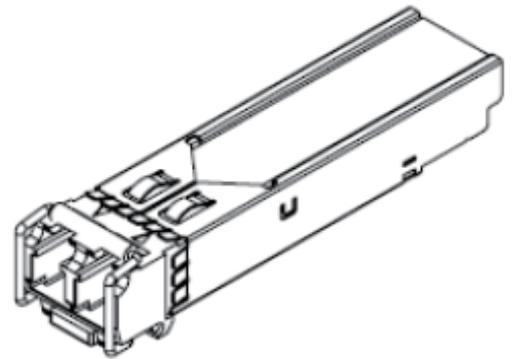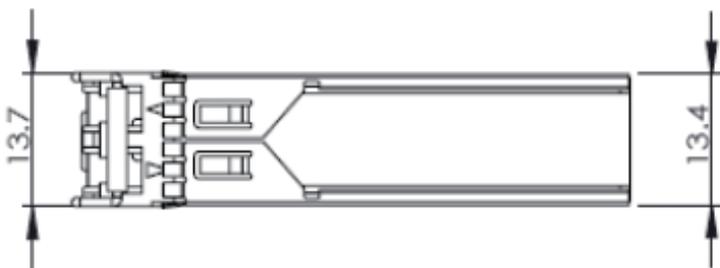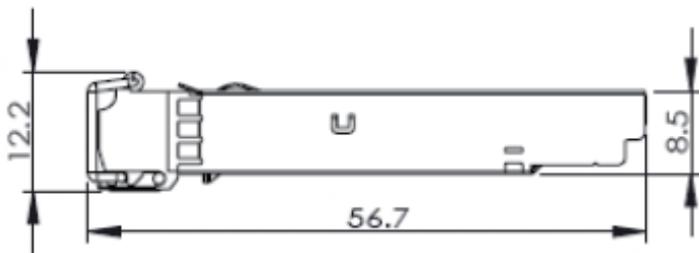

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2021 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.