


## L2+/Lite L3 Gigabit Ethernet Switch

ECS4150-54T/ECS4150-54P

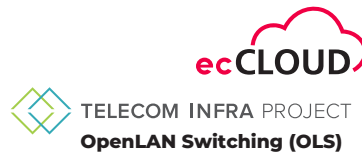

### Product Highlights:

- -5°C to 45°C
- 6KV surge protection
- 3MB packet buffer size
- 48-port 1GE and 6-port 25G SFP28 uplink
- IEEE 802.3 af/at/bt support with 740W budget (ECS4150-54P)
- Web/CLI/SNMP/Cloud multi-management
- 3-year warranty

The Edgecore ECS4150-54T switch is a Gigabit Ethernet access switch with six 25G SFP28 uplinks. The switch is ideal as a high-performance Gigabit access switch with 1 Gigabit downlinks. This switch is also positioned as a cloud edge access switch, connecting IOT and other devices in enterprise and SMB deployments. It is also an ideal Gigabit access switch for SMB, enterprise, and campus networks.


The ECS4150-54P is a PoE switch that can provide up to 90 Watts to power devices such as wireless access points, VoIP phones, surveillance cameras, IoT devices etc. over Cat 5 UTP cable, eliminating the need for individual power sources. The ECS4150-54T/ECS4150-54P is packed with features that bring high availability, comprehensive security, robust multicast control, and advance QoS to the network edge, while maintaining simple management. The switch also supports the most advance IPv6 management, IPv6 security, and IPv6 multicast control in accordance with the growth of IPv6 deployment.

### Key Features and Benefits


- Best price-performance Gigabit Ethernet access switch with 25G uplinks
- ITU-T G.8032 ERPS L2 ring protection with <50ms convergence time
- Comprehensive and field-proven software features for ISPs/carriers, providing broadband access, IPTV services
- L2+/ Lite L3 feature upgrades the L2 switch with routing functionality
- Enhanced security, IPv6, and multicast features
- Simple management (CLI, SNMP, Web, ecCLOUD, TIP OLS)
- Complete private MIB to fully control and monitor the switch via customer's EMS

## Interfaces

ECS4150-54T

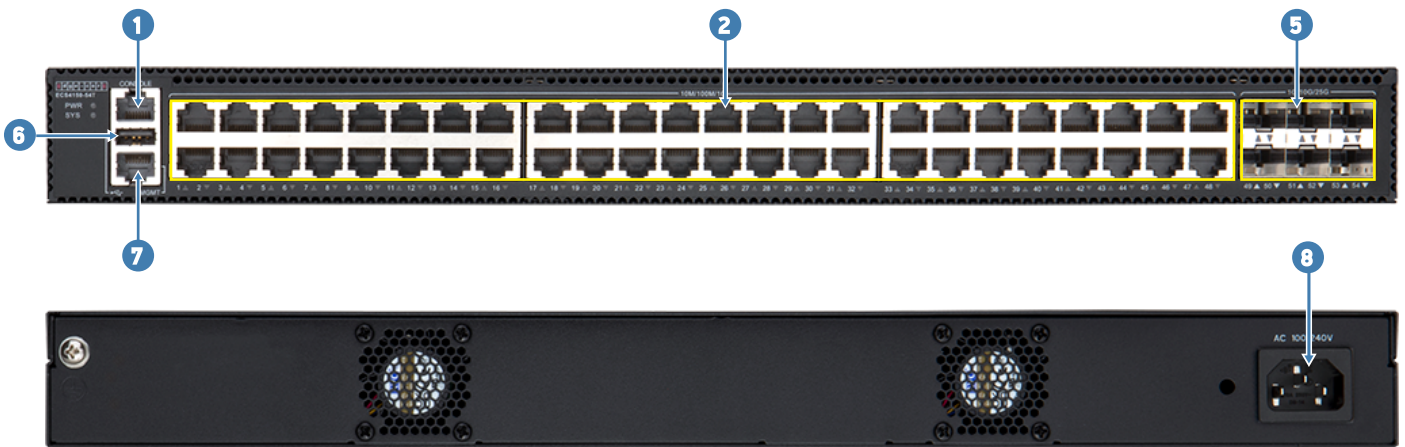

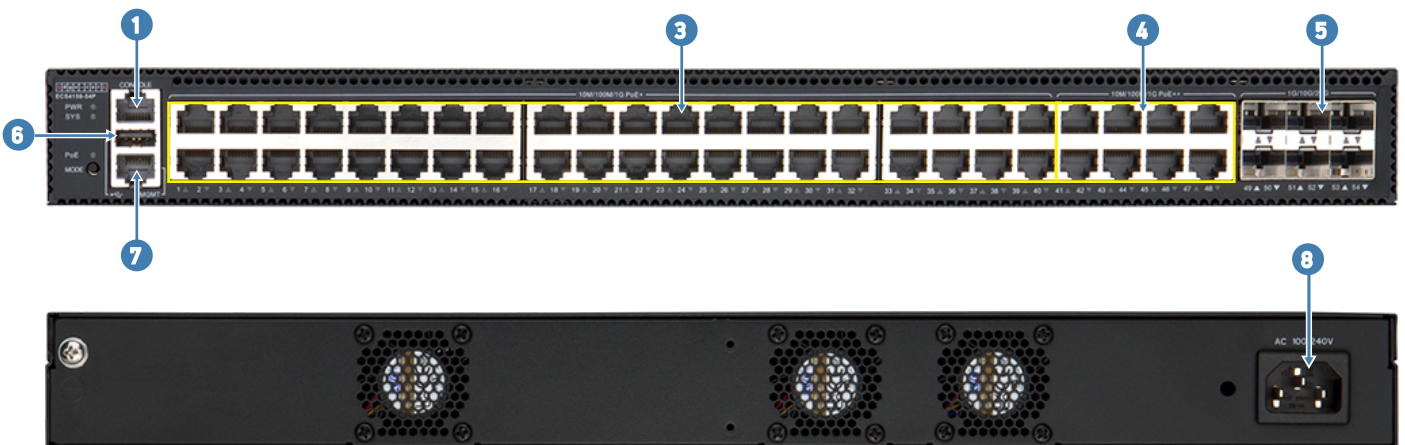

ECS4150-54P



### Description

- |                                                                                          |                               |
|------------------------------------------------------------------------------------------|-------------------------------|
| 1. RJ-45 console port                                                                    | 5. 6 x SFP28 25G uplink ports |
| 2. 48 x RJ-45 10/100/1000BASE-T ports (ECS4150-54T)                                      | 6. USB management port        |
| 3. 40 x RJ-45 10/100/1000BASE-T PoE ports (ECS4150-54P)<br>Port 1~40: PoE+ (max. 30 W)   | 7. RJ-45 management port      |
| 4. 8 x RJ-45 10/100/1000BASE-T PoE ports (ECS4150-54P)<br>Port 41~48 : PoE++ (max. 90 W) | 8. AC power input             |

Product Model		ECS4150-54T	ECS4150-54P
<b>Product Image</b>			
<b>Port</b>	RJ-45 10/100/1000BASE-T Ports	48	48
	SFP28 25G Uplink Ports	6	6
	RJ-45 Console Port	1	1
	RJ-45 Out-of-Band Management Port	1	1
	USB port	1	1
<b>Performance</b>	Switching Capacity	396 Gbps	396 Gbps
	Forwarding Rate	295 Mpps	295 Mpps
	NAND Flash Memory	256 MB	256 MB
	DRAM	1 GB	1 GB
	Packet Buffer	3MB	3MB
	MAC Address Table	16 K	16 K
	Jumbo Frames	10 KB	10 KB
	Auto-negotiation, Auto-MDI/MDIX	Yes	Yes
	Surge Protection	6KV (RJ-45), 6KV (Power)	6KV (RJ-45), 6KV (Power)
	MTBF (at 25°C)	516,924 hrs	361,493 hrs
	Heat Dissipation (BTU/hr)	177	2849
	Acoustic Noise (at 25°C)	< 16 dBA	< 36 dBA
<b>Mechanical</b>	Dimension (W x D x H) mm	442 x 420 x 43.6	442 x 420 x 43.6
	Weight	4.7 kg (10.36 lb)	5.5 kg (12.13 lb)
<b>Power Supply</b>	AC 100-240 VAC, 50/60 Hz	Yes	Yes
	Max System Power Consumption (Watts)	52 W	835 W
<b>PoE</b>	IEEE 802.3af	X	Yes
	IEEE 802.3at	X	Yes
	IEEE 802.3bt	X	Yes
	Power budget	X	740 W
	Auto disable exceeding power budget	X	Yes
	Dynamic power allocation	X	Yes
<b>Environmental</b>	Operating Temperature	-5 ~ 45°C	-5 ~ 45°C
	Storage Temperature	-40 ~ 70°C	-40 ~ 70°C
	Operating Humidity (non-condensing)	5% to 95%	5% to 95%
	Storage Humidity (non-condensing)	5% to 95%	5% to 95%
	Environmental Regulation compliance: WEEE	Yes	Yes
	Environmental Regulation compliance: RoHS	Yes	Yes
<b>Certification</b>	FCC Class A	Yes	Yes
	CE	Yes	Yes
	Safety Compliance: CB	Yes	Yes
	Safety Compliance: UL	Yes	Yes
<b>ecCLOUD/TIP (OLS) Management</b>		Supported	Supported

## L2 Features

- 10/100/1000BASE-T copper interfaces
- Auto-negotiation for port speed and duplex mode
- Auto MDI/MDI-X
- Multi-speed (1G, 10G, 25G) fiber interfaces
- SFP28 Ports Support:
  - IEEE 802.3ae (10GBASE-SR/LR)
  - IEEE 802.3ay (25GBASE-SR)
  - IEEE 802.3cc (25GBASE-LR)
  - IEEE 802.3z (1000BASE-SX/LX) transceivers, and 10G/25G DAC/AOC
- Digital Diagnostic Monitoring (DDM) on 25G SFP28 port
- Flow Control:
  - IEEE 802.3x for full duplex mode
  - Back-Pressure for half duplex mode
- Jumbo frames 10KB
- Broadcast/Multicast/Unknown Unicast storm control
- Spanning Tree Protocol:
  - IEEE 802.1D Spanning Tree Protocol (STP)
  - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
  - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), 64 instances
  - BPDU Guard
  - BPDU filtering
  - Root Guard
  - BPDU transparent
  - Loopback detection
- Non-Spanning Tree loopback detection
- ITU-T G.8032v2 Ethernet Ring Protection Switch
  - Sub 50 msec convergence
  - Revertive operation mode
  - Multiple-ring network
- VLANs:
  - Supports 4K VLAN
  - Port-based VLAN
  - IEEE 802.1Q VLAN
  - GVRP
  - IEEE 802.1v Protocol-based VLAN
  - IP Subnet-based VLAN
  - MAC-based VLAN
  - Traffic Segmentation
- L2 Virtual Private VLAN:
  - Q-in-Q
  - L2 Protocol tunneling (xSTP, CDP, VTP and PVST+, LLDP)
  - CDP/PVST+ Filtering
  - Selective Q-in-Q
- Link Aggregation:
  - Static Trunk
  - IEEE 802.3ad Link Aggregation Control Protocol
  - Trunk Groups: 28, up to 8 GE/ 6 25GE ports per group
  - Load Balancing: SA+DA, SA, DA, SIP+DIP, SIP, DIP
- Multi-chassis Link Aggregation
- Static LACP
- IGMP Snooping:
  - IGMP Authentication
  - IGMP v1/v2/v3 snooping
  - IGMP Proxy reporting
  - IGMP Filtering
  - IGMP Throttling
  - IGMP Immediate Leave
  - IGMP Querier
- MVR (Multicast VLAN Registration): Supports 5 multicast VLANs
- Port mirroring
  - VLAN Mirror/Mac Based Mirror/ACL Mirror
- Remote port mirror (RSPAN)

## QoS Features

- Priority Queues: 8 hardware queues per port
- Traffic Classification:
  - IEEE 802.1p CoS
  - IP Precedence
  - DSCP
  - MAC Access control list (Source/Destination MAC, Ether type, Priority ID/ VLAN ID)
  - IP standard access control list (Source IP)
  - IP extended access control list (Source/Destination IP, Protocol, TCP/UDP port number)
- Traffic Scheduling:
  - Strict Priority
  - Weighted Round Robin
  - Strict + WRR
- Ingress policy map (police rate, remark CoS)
- Egress policy map (police rate, remark CoS/DSCP)
- Rate Limiting (ingress and egress, per port base)
  - GE: Resolution 64 Kbps ~ 1,000 Mbps
  - 10G: Resolution 64 Kbps ~ 10,000 Mbps
  - 25GE: Resolution 64 Kbps~25,000 Mbps
- Auto Traffic Control

## Security

- Port security
- IEEE 802.1X port based and MAC based authentication
- IEEE 802.1X Supplicant
- Dynamic VLAN Assignment, Auto QoS
- MAC authentication
- Web authentication
- Voice VLAN
- Guest VLAN
- L2/L3/L4 Access Control List:
  - MAC Access control list (Source/Destination MAC, Ether type, Priority ID/ VLAN ID)
  - IP standard access control list (Source IP)
  - IP extended access control list (Source/Destination IP, Protocol, TCP/UDP port number)
- IPv6 ACL
- DHCP Snooping
- DHCP Info
- DHCP Option 82
- DHCP Option 82 Relay
- IP Source Guard
- PPPoE IA
- Dynamic ARP Inspection
- Denial of Service
- Login Security
- RADIUS authentication
- RADIUS accounting
- TACACS + authentication
- TACACS + accounting
- TACACS + authorization
- Management Interface Access Filtering (SNMP, Web, Telnet)
- SSH (v2) for security Telnet
- SSL for HTTPS
- SNMP v1/v2c/v3

## Green Ethernet

- IEEE 802.3az Energy-Efficient Ethernet (EEE)

## IPv6 Features

- IPv4/IPv6 dual protocol stack
- IPv6 Address Types Stack: Unicast
- IPv6 Neighbor Discovery:
  - Duplicate address
  - Address resolution
  - Unreachable neighbor detection
- Stateless auto-configuration
- Manual configuration
- Remote IPv6 ping
- IPv6 Telnet support
- HTTP over IPv6
- SNMP over IPv6
- IPv6 Syslog support
- IPv6 TFTP support
- MLD Snooping v1/v2
- IPv6 Source Guard
- DHCPv6 Snooping
- MVR6

## Management

- Zero Touch provisioning
- mDNS
- Switch Management:
  - CLI via console port or Telnet
  - Web management
  - SNMP v1, v2c, v3
- Firmware and Configuration:
  - Firmware upgrade via TFTP/HTTP/FTP/SFTP server
  - Multiple configuration files
  - Configuration file upload/download via TFTP/HTTP/FTP/SFTP server
- RMON (groups 1, 2, 3 and 9)
- DHCP client for IP address assignment
- DHCP dynamic provision Option 66,67
- Sntp
- Syslog (local Flash)
- Remotelog (RFC3164)
- SMTP (E-mail Notification)
- Supports LLDP (802.1ab)
- sFlow v4, v5
- IPv6 sFlow

## OAM

- IEEE 802.3ah EFM (Ethernet in the First Mile)
- IEEE 802.1ag Connectivity Fault Management
  - Cross check
  - Link Trace
  - Loopback
- ITU-T Y.1731 ETH OAM Performance Monitor

## Dying Gasp

## Safety

- UL (CSA 22.2 NO 62368-1 and UL62368-1)
- CB (IEC/EN 62368-1)
- BSMI (CNS 15598-1)

## Power Supply

- Power input:
  - 100 to 240 VAC, 50/60 Hz

## Supported Transceivers and Cables

- 1000BASE-SX/LX/EX/ZX/RJ45
- 10GBASE-SR/LR/ER/RJ45
- 10GBASE-DAC/AOC Cable
- 25GBASE-SR/LR
- 25GBASE-DAC/AOC Cable
  - Note: More optics and detailed cabling information can be found at [www.edge-core.com](http://www.edge-core.com).

## Routing

- L3 Features IPv4
  - Multi-netting
  - CIDR (Classless Inter-Domain Routing)
  - Unicast Routing:
    - Static Routes
- L3 Features IPv6
  - IPv6 Unicast Routing:
    - Static Routes
- RIPv1/v2

## Electromagnetic Compatibility

- CE Mark
- FCC Class A
- CISPR Class A
- BSMI
- VCCI

## Environmental Specifications

- Temperature:
  - 5°C to 45°C (Standard Operating)
  - 40°C to 70°C (Non-Operating)
- Humidity: 5% to 95% (Non-condensing)

## Warranty

Please check [www.edge-core.com](http://www.edge-core.com) for the warranty terms in your country.

## For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit [www.edge-core.com](http://www.edge-core.com).

## About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at [www.edge-core.com](http://www.edge-core.com).

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2025 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.

### Ordering Information

Optional Accessories	Product Description
ET4202-SX	1Gbps, (Distance: 500 m; Wavelength: 850 nm, DDM)
ET4202-LX	1Gbps, (Distance: 10 km; Wavelength: 1310 nm, DDM)
ET4202-EX	1Gbps, (Distance: 40 km; Wavelength: 1310 nm, DDM)
ET4202-ZX	1Gbps, (Distance: 80 km; Wavelength: 1550 nm, DDM)
ET4202-RJ45	1Gbps, (Distance: 100 m)
ET4202-BD43-x0-I	1Gbps, SFP BIDI TX 1490 nm/RX 1310 nm, 10/20/40 km, I-temp (x=1,2,4)
ET4202-BD34-x0-I	1Gbps, SFP BIDI TX 1310 nm/RX 1490 nm, 10/20/40 km, I-temp (x=1,2,4)
ET5402-SR	10Gbps, (Distance: 3000 m; Wavelength: 850 nm, DDM)
ET5402-LR	10Gbps, (Distance: 10 km; Wavelength: 1310 nm, DDM)
ET5402-ER	10Gbps, (Distance: 40 km; Wavelength: 1550 nm, DDM)
ET5402-RJ45	10Gbps, (Distance: 100 m)
ET5402-DAC-xM	10Gbps, SFP+ DAC xM cable (x=1,3,5)
ET5402-AOC-xM	10Gbps, SFP+ AOC xM cable (x=3,5,7,10)
ET7302-SR	25Gbps, SFP28 Short Reach Transceiver
ET7302-LR	25Gbps, SFP28 Long Reach Transceiver
ET7302-DAC-xM	25Gbps, SFP28 DAC cable with xM (x= 1,3,5)
ET7302-AOC-xM	25Gbps, SFP28 AOC cable with xM (x= 5,7,10)
ecCLOUD Network Management Software	