

## DATA CENTER SWITCH

### APS800-160



The Edgecore APS800-160 is a high performance, low power, low latency, fully programmable SDN data center switch designed for data center, cloud, and AI networks.

The APS800-160 is a 16-OSFP800-port switch in a 1RU form factor. Each of the OSFP800 ports can breakout to 2x400G, 4x200G or 8x100G, optimizing compute racks by enabling 100Gbps-per-lane server links and 800G uplink optics. The device is an ideal leaf or ToR switch for cloud data center operators that are driving the rapid adoption of 800Gbps optical modules while also upgrading compute server NICs to 400Gbps speeds.

The APS800-160 also supports Xsight Instruction Set Architecture (ISA) for users to define flexible packet processing rules, routing protocols, and network policies. The programmability is also an important underlying capability for many of the advanced features, including queue management, congestion control, and telemetry. The programmability will handle newly-defined notification mechanisms, such as the Ultra Ethernet Transport (UET) protocol, packet trimming, and back-to-sender signaling.

Optimized for interconnecting AI/ML, storage, and compute clusters in data centers, the APS800-160 supports congestion-aware routing, which comprises measuring and signaling congestion as well as load balancing across the network fabric. For a given fabric link, the APS800-160 can measure flow rate, latency, and queue level. When congestion is detected, it can signal using Explicit Congestion Notification (ECN), Congestion Signaling (CSIG), or other customer-defined mechanisms. The APS800-160 can handle flowlet-based load balancing and packet spraying across fabric links, as well as traditional flow-based approaches like ECMP.

## Key Features and Benefits

- Supports 12.8Tbps full-duplex throughput
- Supports 100 Gbps PAM4 LR SerDes with a retimer-less design
- The 16 OSFP800 ports can breakout to 2 x 400G, 4 x 200G, or 8 x 100G
- UEC-ready programmable congestion measurement and signaling to facilitate dynamic load balancing and fast failure detection and recovery
- UEC-ready weighted congestion-aware dynamic load balancing for reducing tail latency
- Supports port-to-power airflow direction
- All ports on front; PSUs and fans accessible from rear
- Hot-swappable, load-sharing, redundant AC power.
- 5+1 redundant, hot-swappable fan modules
- Switch pre-loaded with diagnostic and Open Networking Install Environment (ONIE) for automated loading of compatible open source and commercial NOS offerings.



Freedom  
of choice



Greater  
control




Rapid  
innovation



Reduced  
CAPEX and OPEX



Interfaces

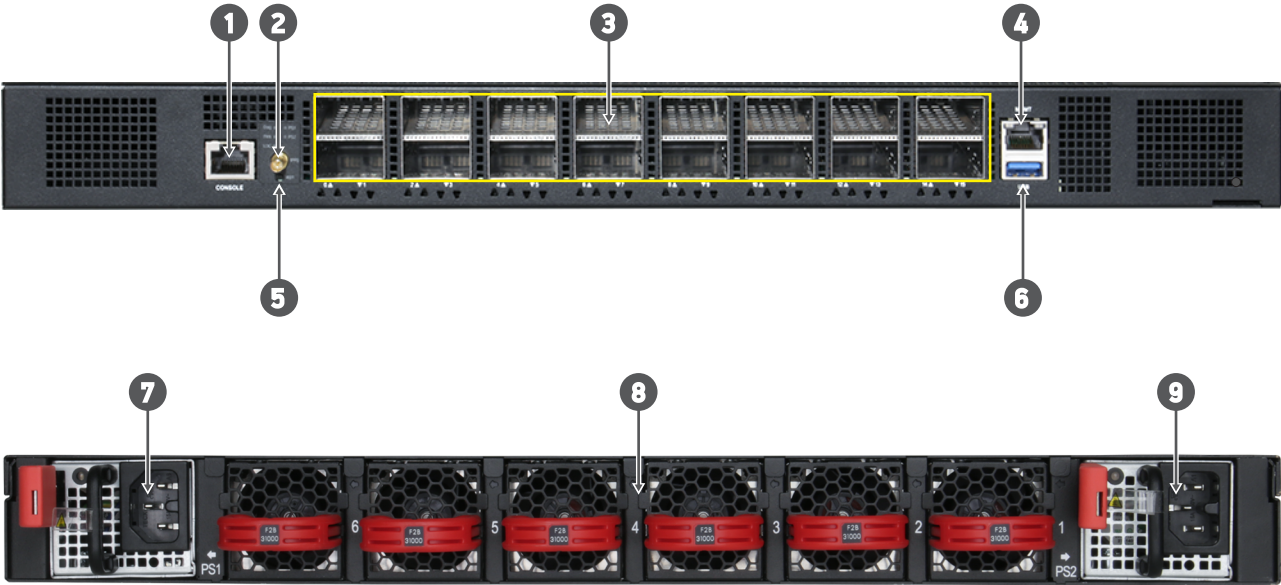

Description	
1. Console port	6. USB 3.0 storage port
2. 1PPS SMA connector	7. PSU 1
3. 16 x 800G OSFP ports	8. Hot-swappable 5 + 1 redundant fans
4. Management port	9. PSU 2
5. Reset button	

## Ports

- Switch Ports:  
16 x OSFP800 switch ports, each supports 2 x 400GbE, 4 x 200GbE, and 8 x 100GbE via breakout cables
- Management Ports on Port Side:  
1 x RJ-45 serial console  
1 x RJ-45 1G BASE-T management  
1 x USB Type A storage
- Supported Transceivers and Cables:  
800G OSFP SR8  
800G OSFP 2 x SR4 50 m  
800G OSFP 2 x FR4 2 km  
800G OSFP 2 x DR4 500 m
  - Note: More optics and detailed cabling information can be found at [www.edge-core.com](http://www.edge-core.com).

## Key Components

- Switch Silicon: Xsight Labs X2
- CPU Modules:  
Intel® Xeon® D-1713NTE 4-Core 2.2GHz  
32GB DDR4 SO-DIMM with ECC  
1TB m.2 2280 NVMe SSD

## Performance

- Switching Capacity: 12.8 Tbps (full duplex)
- Jumbo frames support up to 9216 Bytes
- Packet Buffer Size: 64 MB integrated packet buffer

## Physical and Environmental

- Dimensions (WxDxH): 442 x 509 x 44 mm (17.40 x 20.04 x 1.73 inch)
- Weight: 10.005 kg (20.05 lb)
- Fans: 5+1 hot-swappable redundant fans
- Operating Temperature: 0°C – 40°C (32°F – 104°F)
- Storage Temperature: -40°C – 70°C (-40°F – 158°F)
- Operating Humidity: 0% – 95% non-condensing
- Operating Altitude: 0 – 10,000 feet

## Software

- Switch is loaded with Open Network Install Environment (ONIE) software installer
- Compatible with the following NOS options: open source options, plus commercial NOS offerings

## LEDs

- OSFP Port LEDs: Link Status, Activity, Rate
- Ethernet Management Port LED: Link Status, Activity
- System LEDs: Diagnostic, Locator, PSU and Fan Status

## Power

- PSUs: 2 redundant, load-sharing, hot-swappable AC PSUs
- AC Input Voltage: 90 to 240 VAC at 50-60 Hz

## Regulatory Compliance

- EMI  
FCC
  - FCC 47 CFR Part 15 Subpart B Class ACE
  - EN55022 Class A
  - EN55035
  - EN300 286
  - EN 61000-3-2
  - EN 61000-3-3UKCA
  - BS EN 62368-1: 2014 + A11: 2017VCCI
  - VCCI-32
- Safety  
UL/ CUL
  - UL, CSACB
  - IEC: EN-60950-1 & IEC 62368
- RoHS  
Restriction of Hazardous Substances (RoHS) 6/6  
China Restriction of Hazardous Substances (RoHS)
- Environmental:
  - Low-Temperature Exposure and Thermal Shock (packaged): NEBS GR63-CORE ISSUE 5, Section 4.1.1.1
  - High Relative Humidity Exposure (Packaged): NEBS GR63-CORE ISSUE 5, Section 4.1.1.2
  - High-Temperature Exposure and Thermal Shock (Packaged): NEBS GR63-CORE ISSUE 4, Section 4.1.1.3
  - Operating Temperature and Relative Humidity: NEBS GR63-CORE ISSUE 5, Section 4.1.2
  - Altitude : NEBS GR63-CORE ISSUE 4, Section 4.1.3
  - Handling Drop Tests -Packaged Equipment: NEBS GR63-CORE ISSUE 5,Section 4.3.1.1
  - Unpackaged Equipment -Drop Tests (All Equipment): NEBS GR63-CORE ISSUE 5, Section 4.3.2
  - Earthquake (10U Rack): NEBS GR63-CORE ISSUE 4, Section 4.4.1 (Zone4)
  - Office Vibration Test Procedure;90 minutes/axis (Stand & 42U Rack): NEBS GR63-CORE ISSUE 5,section 4.4.4
  - Transportation Vibration-Packaged Equipment: NEBS GR63-CORE ISSUE 5, section 4.4.5
  - Acoustic noise: NEBS GR63-CORE ISSUE 5, section 4.6
  - Bump: IEC60068-2-29- packaged
  - Shock: ETSI EN 300 019-2-3 -Operational Tests, Class T3.2 op

**Warranty**

Please check [www.edge-core.com](http://www.edge-core.com) for the warranty terms in your country.

**For More Information**

To find out more about Edgecore Networks Corporation products and solutions, visit [www.edge-core.com](http://www.edge-core.com).

**About Edgecore Networks Corporation**

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at [www.edge-core.com](http://www.edge-core.com).

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2025 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.